

AVAILABLE MOUNTING CONFIGURATIONS

3STH-F FRAME MOUNT
3STH-EM ENGINE MOUNT

OPERATING LEVELS

MIN FLOW	300 GPM	68.1 m ³ /h
MAX FLOW	1050 GPM	238.5 m ³ /h
DISCHARGE SIZE	3"	75 mm
SUCTION SIZE	4"	100 mm
SOLIDS HANDLING	2.50"	63.5 mm
MAX SPEED	2200 RPM	2200 RPM
SHUT-OFF HEAD	277'	84.4 m
BEP HEAD	205'	62.5 m
BEP FLOW	860 GPM	195.3 m ³ /h
BEP EFFICIENCY	59%	59%



A typical picture of the pump is shown. Please contact Cornell Pump Company for further details. All information is approximate and for general guidance only.

HIGH-HEAD SELF-PRIMER

Cornell's self-priming pump, with industry-leading efficiency, runs several percentage points higher than other manufacturers. Features patented Cycloseal® system and uniquely designed volute for best performance, with a 4" suction and 3" discharge.

- FIVE-YEAR warranty
- Optional self-cleaning wear plate
- Modular bearing frame
- Cornell's Cycloseal® with type 2 seal
- Dual protection of bearings with external seal leakage monitor (vent to atmosphere)
- High Heads up to 277'

- High-efficiency design
- Oversized oil reservoir for better cooling
- Replaceable shaft sleeve
- Heavy-duty ductile iron construction
- Designed for SAE conversion
- High RPM Capability



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL & GAS





REFRIGERATION



RENTAL

3STH (VARIOUS RPM)

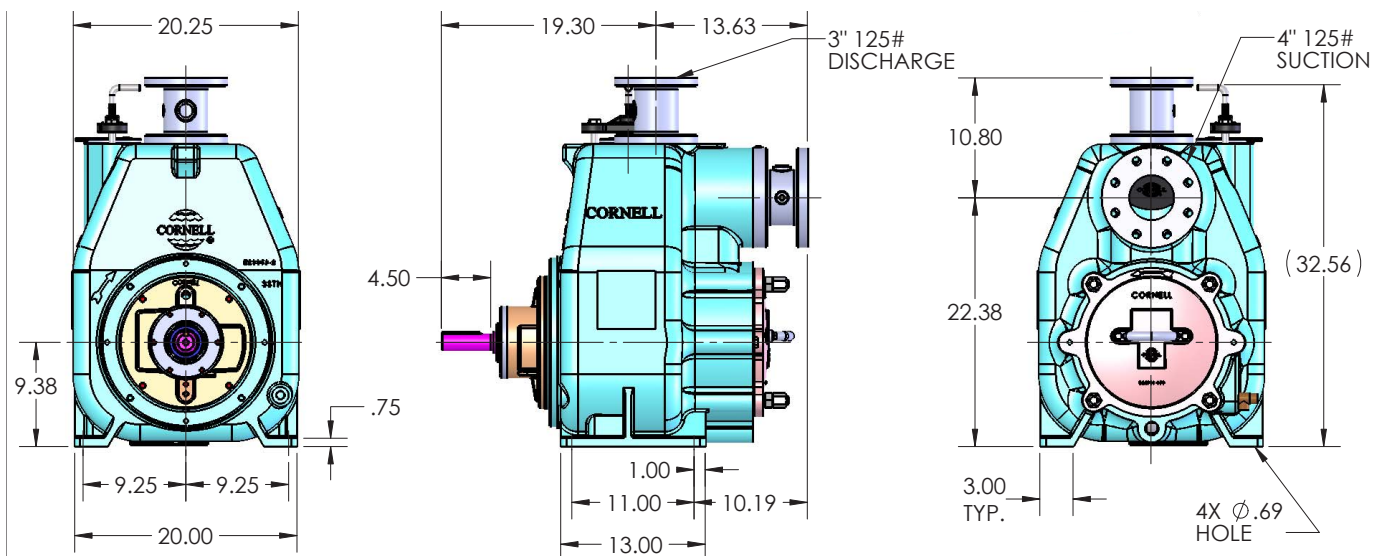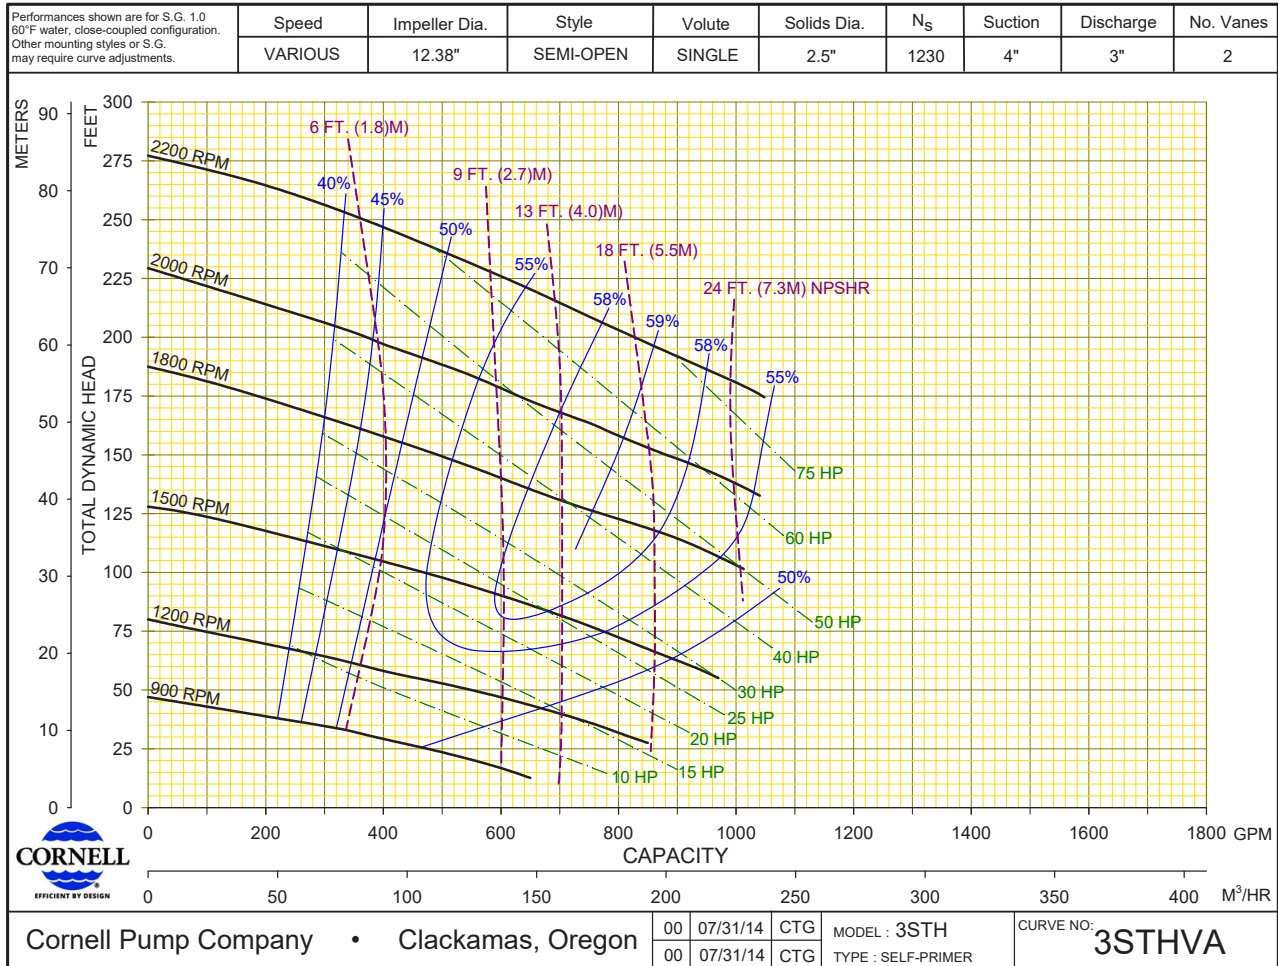

DS3STH-140826-P